




inTCxxS2N2D30



Tower Camera Series

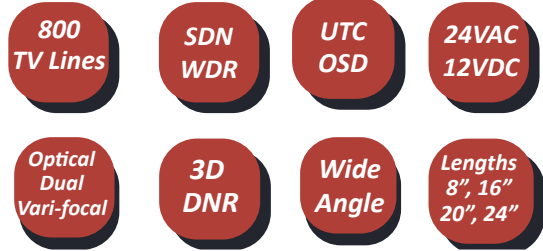

The new **inMotion** slim line of Tower Cameras are designed for applications where high resolution close ups are required of individuals during transactions.

Cameras are mounted in aesthetically pleasing housings that can easily be mounted at payment windows, teller points or other locations where transactions may take place.


Applications:

- Banking
- Retail
- Immigration Control
- Car Rental
- Airline Security
- Licensing

Features:

- 8", 16", 20", 24" lengths available
- Counter Top Mount
- 3.0mm Lens
- Tigershark WDR Sensor
- inMotion inViVid® Color Technology
- Ultra High 800 TVL
- Wide Dynamic Range (WDR) 130db
- Optical Dual Vari-Focal
- CVBS Analogue Video Output
- Privacy Zones
- Optional UTC (Up the Coax) OSD Programmer
- 12VDC or 24VAC

Dimensions of
24"
Tower Camera

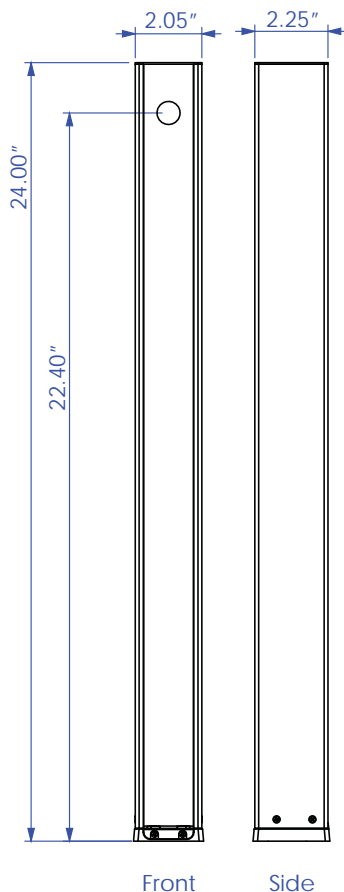

	System	PAL	NTSC	
Imaging	Sensor	Mega Pixel Sensor		
	Effective Pixels	1305x1049		
Performance	Resolution	800TVL		
	Sensitivity	0.01Lux		
	Wide Dynamic Range	130dB Max		
	S/N Ratio	52dB		
	Day / Night	Software Controlled		
Lens	Type	Fixed 3.0mm		
Functions	OSD	English/Chinese		
	Shutter	1/50~1/120,000	1/60~120,000	
	Flickerless	On/Off		
	Wide Dynamic Range	Off/Low/Medium/High		
	BLC (Back Light Comp)	Off/Low/Medium/High		
	AGC	Off/Adjustable Level		
	Digital Slow Shutter	Adjustable level		
	Digital Image Stabilization	Yes		
	Electronic shutter	Yes		
	Sync	Internal/External		
	Camera ID Number	Off/On 1~256		
	Camera Name	Off/On, 8 Characters		
	White Balance	ATW/Push/Manual		
	3D DNR	Off/Low/Medium/High		
	Gamma	0.35~0.55		
	Chroma Gain	Adjustable		
	Motion Detection	4 areas, Off/On, Position & Sensitivity		
	Privacy masking	8 areas, Off/On, Color, Position		
	Image functions	Flip, Mirror, D-Zoom		
	Input/Output	Video Output	CVBS 1.0Vp-p 75Ω	
		Programming interface	Optional UTC Controller	
	Power	Voltage	12VDC/24VAC ±10%	
		Power	4.2W Max.	
	Color	Texture	Black	
	Environmental	Operating Temperature	-10°C~+50°C	
Humidity		Less than 90%, non condensing		
Order Codes	8" Tower Camera	inTC08S2N2D30		
	16" Tower Camera	inTC16S2N2D30		
	20" Tower Camera	inTC20S2N2D30		
	24" Tower Camera	inTC24S2N2D30		

inMotion International reserve the right to amend specifications and design without prior notice